

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

This Page Blank (uspto)

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

PCT/ SE 00 / 0 1 3 0 7

REC'D 14 AUG 2000

WIPO

PCT

Intyg Certificate



Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

SE 00/01307

(71) Sökande Pacesetter AB, Järfälla SE
Applicant (s)

(21) Patentansökningsnummer 9902735-1
Patent application number

E U

(86) Ingivningsdatum 1999-07-19
Date of filing

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Stockholm, 2000-03-22

För Patent- och registreringsverket
For the Patent- and Registration Office

A. Södervall
Anita Södervall

Avgift
Fee 170:-

PACEMAKER

Technical Field

The present invention relates to a pacemaker operable in a tracking and a non-tracking mode and having an automatic mode switching function for switching the pacemaker into a non-tracking mode of operation in response to the detection of an atrial tachycardia, said pacemaker including atrial detecting means for detecting atrial events, ventricular detecting means for detecting ventricular events, an atrial interval determining means for determining the interval between consecutive atrial events, a comparison means for comparing said interval with a predetermined atrial tachycardia limit value for recording a tachy indication if said interval is less than said atrial tachycardia limit value, and a mode switching means for switching the mode of operation to said non-tracking mode when the number of recorded tachy indications reaches a predetermined tachy count limit.

Background

Patients with paroxysmal atrial tachycardias who require e.g. DDD pacing run the risk to enter into a situation of inappropriate rapid pacing due to tracking of the atrial rhythm. It has been observed that a non-physiologic high ventricular stimulation rate in a tracking mode of operation is the primary source of the suffering of the patient and not the atrial tachycardia in itself. As a rule, more than 50% of patients, which have had periods of atrial tachycardia before the implantation of a pacemaker, will have it again, and more than 30% of pacemaker patients which have not had any suspected atrial tachycardia will get at least one episode of tachycardia during a five year period after implantation. If these patients were paced with a pre-set rate, possibly modulated by a rate-adaptive sensor, they would not have AV synchrony during periods of sinus rhythm and therefore be compromised. Several solutions comprising mode switching have

therefore been proposed to avoid inappropriate tracking of atrial arrhythmias and to provide tracking of the sinus mode at all other times. Usually such a mode switch of the pacemaker changes the mode of response to atrial sensed events from a tracking to a non-tracking mode. When the atrial rhythm exceeds a predetermined detection rate for a set number of intervals the ventricle will consequently be paced at a predetermined rate and when sinus rhythm resumes, the pacemaker is switched back to an atrial tracking mode.

Thus in e.g. US-A-5,085,215 a metabolic demand driven rate-responsive pacemaker is described, which is switched into a VVI mode, when a maximum atrial tracking rate is reached. In the VVI mode ventricular pacing pulses are generated at a rate which is a function of a metabolic indicator rate and independent of atrial heartbeat sensing.

US-A-5,514,164 discloses an implantable pacemaker normally operating in a DDD mode and reverting to a modified DDI mode in response to the sensing of atrial depolarisation early in the pacing cycle. The DDI mode operates in the same way as the DDD mode except that the atrial signals are not tracked. Hence, detection of P-waves in the DDI mode result in inhibition of atrial output with normal ventricular timing. The DDI mode continues only to the end of the pacing cycle. During the next pacing cycle the DDI mode is initiated again only if a P-wave is again sensed early in the pacing cycle, otherwise DDD pacing continues.

There is a need for improvement of automatic mode switch algorithms known today.

Some prior art algorithms may be considered slow because of too long a period of confirmation before the mode switch occurs and some systems switch mode incorrectly caused by improper detector design resulting in false indications in conjunction with too short a confirmation period. Some automatic mode switch systems do not have a reliable signal

sensing, which may also result in non-detection of some cardiac events. Further, unnecessarily long refractory periods of prior art systems may give blindness to atrial tachycardia and the time from tachycardia starts until mode switch is very unpredictable and depending on the tachycardia rate or programmed tachycardia limit.

There does not exist any automatic mode switch design today, which is suitable for all types of patients. A few patients prefer a longer time for the mode switching, typical several seconds, if false mode switchings can be avoided in this way. However, most of the patients want to avoid any unnecessarily high stimulation rates, even for a few seconds.

A correct signal detection is the first and most important factor for a satisfactory mode switch function. Several types of pacemakers are provided with only one atrial signal detector. When the sensitivity of this detector is adjusted appropriately for detection of normal P-waves, some types of atrial tachycardias will be detected only intermittently. The mode switching then has to be based on "guessings". Further, during pacemaker implantation and the accompanying follow-up atrial tachycardia signals are most often not obtainable. It is therefore an obvious risk that the physician will choose a sensitive setting, which is too high or too low for atrial tachycardia detection. Often a very high sensitivity is chosen, which together with unsuitable filter designs may result in the detection of R-wave farfields and also interferences, which may influence the normal pacing rate and even give rise to false mode switches.

This detector sensitivity dilemma is one reason for a problematic mode switch function of several existing products.

Thus, to distinguish an atrial tachycardia from an interference or some premature heart signals merely by measurement of atrial intervals and counting of the number of such

intervals might not be sufficient. As a matter of fact several factors have to be considered.

If farfield R-waves are sensed by the atrial detector the pulse generator timers of the pacemaker will be restarted with restart of refractory periods as well. Ventricular stimulations with accompanying blanking periods are also synchronized to the sensed atrial signal, the stimulation rate being of course limited by the maximum tracking rate. The blanking intervals, which may cover atrial events, are consequently repeated more frequently. All these intervals resulting from a mixture of sensed and stimulated events must be considered when designing an automatic mode switch system and not only the free atrial-atrial signals.

If spontaneous ventricular beats are omitted, three different situations of mixed sensed and stimulated cardiac occurrences are possible during an atrial tachycardia in DDD mode of operation of a pacemaker. These situations are illustrated by symbolic ECG's shown in figure 1 a), b) and c).

AF denotes an atrial signal, which can be a P-wave, flutter or fibrillation sensed on the atrial electrode. V denotes a ventricular stimulation pulse, and ? denotes the associated blind atrial blanking period, during which an atrial signal may have occurred.

The situation illustrated at a) in figure 1 is characterized by one atrial signal AF intervening between two ventricular stimulations V. An atrial signal can be hidden during the atrial blanking ?. Since this situation can be stable during an atrial flutter, it can be hard to distinguish between atrial flutter and a normal situation with a high sinus rate without any hidden signals. Even if not all the atrial signals are hidden during an unstable tachycardia, a sufficient number of atrial signals can disappear such that a pacemaker, the control of which is based on long/short atrial intervals, can be wrongly operated. The only effective

solution to this problem consists in changing the stimulation interval, such that when the time of ventricular stimulation is altered, the atrial blanking interval will not be positioned on half the atrial-atrial signal interval.

- 5 The situation according to b) in figure 1 with two atrial signals AF between two consecutive ventricular stimulations V will make detection possible for all situations provided that the used pulse generator design does not involve unnecessary refractory periods. The algorithms used for controlling the
- 10 pacemaker can be more or less effective in situations of coverage of some of the atrial signals by the post ventricular atrial blanking periods ?, because there will be a measured long atrial interval which can counteract the tachycardia determination.
- 15 At c) in figure 1 a situation is shown with three atrial signals AF appearing between each two consecutive ventricular stimulations V. In this case correct AF detection will be possible, provided that the pulse generator design does not involve unnecessary refractory periods and provided that
- 20 there is no interference protection, which may be erroneously operated by the detected high rate. For this situation, with a very high atrial rate, there is a higher probability for coverage of some of the atrial signals by the post ventricular atrial blanking periods ?. If long atrial counting intervals are used in the algorithms for controlling the
- 25 pacemaker, a slowing down can occur before the mode switch.

Only at extremely high atrial rates and extreme parameter settings four atrial signals AF may occur in one V-V interval. This case is principally similar to the situation

30 shown at c).

Another important factor, which may give rise to problems, is the consideration time from a detection of a short AF-AF interval until a mode switch takes place. Depending on the signal detector design the needed confirmation time will be

shorter or longer for one and the same patient depending on the sequence of heart signals in conjunction with other pacemaker timings, such as refractory periods and stimulation intervals. This means that the mode switch confirmation time
5 very often cannot be predicted.

The purpose of the present invention is to provide a pacemaker operable in a tracking or a non-tracking mode of operation having an improved mode switching function for switching the pacemaker into the non-tracking mode of operation in response to the detection of an atrial tachycardia.
10

Disclosure of the Invention

This purpose is obtained with a pacemaker as defined in the opening paragraph of the description having the characterizing features of claim 1.

15 Thus, in the pacemaker according to the present invention, not only atrial intervals but also other cardiac event intervals are analysed during a predetermined number of stimulation intervals to obtain a safe indication of whether a tachycardia exists or not.

20 If the atrial-atrial signal interval is shorter than the tachycardia limit value and no other cardiac event interval is longer than this limit in the considered V-V interval, this is used as a tachy indication. If at least one measured interval between any combination of sensed cardiac events or stimulations during a V-V interval is longer than the
25 tachycardia limit value this is considered as a non-tachy indication. If there is no atrial indication of tachy nor any indication of non-tachy during an V-V interval, then the mode change counter is not altered.

30 In the pacemaker according to the invention the necessary logic of the mode switching means is reduced compared to prior art designs. Due to its simplicity it will be more safe and easier to validate. Further, the number of programmable

parameters will be few, which consequently reduces the work of the physician and reduces the risks of mistakes. The time from the start of a tachycardia to the mode switch and back in the opposite direction is predictable and independent of the tachycardia rate, and can be selected in accordance with the patient's preferences.

According to an advantageous embodiment of the pacemaker according to the invention the atrial detecting means comprise a P-wave detector for detecting ordinary P-waves and an atrial tachycardia detector of higher sensitivity for monitoring atrial tachycardia signals. Thus synchronisation and stimulation are controlled by a detector having sensitivity suitable for detection of normal P-waves, while the monitoring for detecting an atrial tachycardia is performed by a more sensitive detector. In this way the above mentioned detector sensitivity dilemma is remedied.

According to other advantageous embodiments of the pacemaker according to the invention the mode switching means comprises an up/down counter which is adapted to be counted up by one for each tachy indication and counted down by one for each non-tachy indication. When the number of ventricular stimulation intervals with indicated tachy has reached a programmed limit, a mode switch to the non-tracking mode occurs. The programmed limit can preferably be in the range of 1-8 intervals. In this way a higher security is obtained for switching modes only in response to the detection of a true tachycardia. If, on the other hand, longer intervals are detected in the non-tracking mode of operation, a consideration process starts for eventually switching back to the tracking mode. If indications of non-tachycardia are obtained during the consideration process, the counter is counted down and when the counter reaches a predetermined limit the mode switching means is triggered to change the mode of operation back to the tracking mode. Thus, in said non-tracking mode of the pacemaker, said mode switching means is adapted to switch mode of operation back to the tracking

mode when its tachy indication counter is counted down by a predetermined number from said predetermined tachy count limit.

5 According to yet another advantageous embodiment of the pacemaker according to the invention a means is provided for changing the AV interval in order to uncover possible atrial events covered by the ventricular blanking period. In this way a more reliable detection of the atrial tachycardia is achieved and consequently a more reliable mode switch
10 function.

The stimulation rate can be P-wave controlled, atrial tachycardia signal controlled during the transitional phase of considering a mode switch or equal to a base rate in case of failing heart activity. According to an advantageous
15 embodiment of the pacemaker according to the invention said base rate is sensor controlled.

Brief Description of the Drawings

To explain the invention more in detail an embodiment of the pacemaker according to the invention, chosen as an example,
20 will now be described with reference to figures 2-11 on the drawings, on which

Figure 1 shows symbolic ECG's for three different situations of mixed cardiac events,
figure 2 shows an overview of a pacemaker system according to the invention,
25 figure 3 shows the electronics of the pacemaker according to the invention in block form,
figure 4 illustrates the Mode Switch Electronics of the pacemaker according to the invention,
30 figure 5 shows a Generalised Counter Block for counting clock signals for time measurements in the pacemaker according to the invention,
figure 6 illustrates more in detail the Generalised Counter Block shown in figure 5,

figure 7 shows the counter in figure 6 more in detail,
figure 8 shows the Atrial Interval Counter in the form of a
generalised counter block,
figure 9 shows a Cardiac Event Interval Counter in the form
of a generalised counter block,
figure 10 shows more in detail the Automatic Mode Switch
(AMS) Check Block of figure 4, and
figure 11 shows more in detail the counter of the AMS Check
Block shown in figure 10.

Description of a Preferred Embodiment

Figure 2 shows an overview of the whole system of the
pacemaker according to the invention including a pulse
generator 2 with DDD functions and mode switch electronics
for changing the mode of operation from the tracking DDD mode
to a non-tracking mode of operation, like a DDI mode, in
response to the detection of an atrial tachycardia, and back
again to the tracking DDD mode when the tachycardia no longer
is detected. The pacemaker 2 is connected through atrial and
ventricular leads 4, 6 including associated electrodes 8, 10
to the atrium 12 and the ventricle 14 respectively of a
patient's heart 16.

Figure 3 shows in the form of a block diagram the electronics
of the pacemaker 2 in figure 2. Block 18 is a service unit
comprising electronics for test, control and communication,
like means for telemetry, diagnostics, storage of measured
data, power supply control etc. These means are not of
primary importance for the invention and are well known to
the man skilled in the art and will consequently not be
described in greater detail.

The pulse generator 20 is a timing unit, comprising DDD and
DDI timing functions including electronics for control of
time intervals and output of the pacemaker.

Block 22 represents mode switch electronics including means for signal monitoring and means for controlling the modes of operation. The different parts of this mode switch electronics 22 will be described more in detail below. Blocks 24 and 26, intended to be connected to the atrial lead and the ventricular lead respectively, comprise electronics for atrial stimulation output and ventricular stimulation output respectively, as well as signal detections. Thus these blocks 24, 26 include heart signal amplifiers and detectors, stimulation output stages, protection components and de-coupling capacitors.

Figure 4 shows the Mode Switch Electronics of block 22 in figure 3 in greater detail. This mode switch electronics 22 comprises an Atrial Tachycardia Counter 28 and a Cardiac Event Interval Counter 30 in the form of two generalised counter blocks for checking intervals as will be described more in detail in the following.

An Automatic Mode Switch (AMS) Check Block 32 comprises electronics which are active during a check or consideration phase to determine if a switch of the mode of operation of the pacemaker shall occur or not. The block 32 includes a counter, described in greater detail with reference to figures 10 and 11 in the following, which is arranged to count up or down depending on the controlling in-signals.

A start signal is created by the logics formed of the network of logic gates 27, 29, 31, 33 and 35 shown in the figure. Thus in the DDD mode, when an atrial interval shorter than the tachycardia limit value is detected, a start signal will be generated. In a DDI mode, when one interval between any of two cardiac events, as measured by the Cardiac Event Interval Counter 30, is longer than the tachy limit value a start signal will also be generated.

An index register 34 is provided for storing the last decided mode during a new consideration phase, in which the automatic mode switch check block 32 is active.

5 Figure 5 shows a generalised counter block used as Atrial Tachycardia Counter 28 and additional cardiac event interval counter 30 in figure 4. The block 36 includes logic for control, counting of clock signals, and memorising indications.

The function of the counter block 36 is as follows:

10 After receiving a start signal on the Start Event line 38, every clock pulse 40 is counted until the first of two possible events occurs. These events are the number of clock pulses 40 passes a specific pre-set value, set data 42, or a signal appears on the stop event line 44. Which of these two
15 events that happens first is indicated on the line c/o control 46. After a Start Event 38, during counting of the block 36, it is indicated on a Control During Counting line 48 that the counter block 36 is active.

The counter block 36 used as an Atrial Tachy Counter 28, see
20 figure 4, is a time counter for determining the time between the detection of two consecutive atrial signals AF. The counter 28 starts and stops on detection of atrial signals or as a result of time out. Other cardiac events do not influence this counter 28. At an atrial signal AF detection the
25 counter 28 is loaded with the predetermined tachy count limit ATI and the real time clock, 40 in figure 5, will count down the counter 28. A new AF detection before the counter has reached zero results in a tachy indication. The occurrence of a time out, i.e. the counter 28 reaches zero, or an
30 intervening ventricular stimulation V or ventricular signal detection R-wave results in a dismissed indication.

The counter block 36 in figure 5, used as Cardiac Event Interval Counter 30 in figure 4, is started and stopped on

every cardiac event according to the following decision table.

Denominations for the decision table

A	Atrial stimulation
V	Ventricular stimulation
P	Atrial signal detection / P-wave detector
AF	Atrial signal detection
R	Ventricular signal detection / R-wave
VB	End of ventricular blanking period
ATI	Atrial Tachycardia Limit
UCP	UnCovering Process necessary to find eventually atrial signals during ventricular blanking

5

Decision Table of Tachycardia

Interval	Limit check	Decision
AF-AF*	< ATI	tachy
AF-AF	> ATI	non-tachy
AF-V	< ATI	dismissed
AF-V	> ATI	non-tachy
AF-R	< ATI	dismissed
AF-R	> ATI	non-tachy
AF-A	< ATI	dismissed
AF-A	> ATI	non-tachy
VB-AF	< ATI	dismissed, UCP
VB-AF	> ATI	non-tachy
VB-R	< ATI	dismissed
VB-R	> ATI	non-tachy
VB-A	only > ATI	non-tachy

10

Decision Table for the Mode Change Counter (MCC)

All indications are used during the period from one ventricular stimulation to the next ventricular stimulation.

Indications	Counts
Tachy Indication & Dismissed Indications	MCC + 1
Non-tachy Indication & Dismissed Indications	MCC - 1
Only Dismissed Indications	MCC no change
Tachy Indication, then Non-Tachy Indication (and eventually Dismissed Indications)	MCC -1
Non-Tachy Indication, then Tachy Indication (and eventually Dismissed Indications)	MCC +1

5 At the start the counter 30 is loaded with the predetermined Atrial Tachycardia Limit ATI and the real time clock 40, see figures 4 and 5, will count down the counter 30. Any stop of the counter 30 before it reaches zero will result in a dismissed indication and a time out of the counter 30 in a
10 non-tachy indication as appears from the decision table above.

The Atrial Tachycardia Limit ATI, which is the interval limit value used in the pacemaker electronics, is programmable. The selected corresponding rate limit can thus be varied,
15 preferably in steps of 10 beats per minute within the range 150-250 beats per minute.

Figure 6 shows the structure of the generalised counter block 36 shown in figure 5.

20 The counter block 36 controls other logic parts in the pacemaker through the two control lines c/o control 46, and Control During Counting 48. On the Control During Counting line 48 it is indicated that the counter is active, as mentioned before. On the c/o control line 46 it is indicated whether the counter has reached the same number of clock
25 pulses 40 as the set binary value on line 42, cf. figure 5, or if the counting has been stopped by a stop event, 44 in

figure 5, before counting out. These two possible occurrences result in opposite status on the c/o control 46.

5 The counter block 36 comprises a register 50 in which set data values are stored. These set data can be supplied from an external device through telemetry or be produced internally in the pacemaker, cf. figure 3, and are normally kept constant. However, when new set data shall be stored these are supplied on data lines 52 and this supply is controlled by the load new data line 54.

10 The operation of the block shown in figure 6 is as follows. A Start Event control signal 56 is supplied through an AND-gate 58 having one of its inputs inverted to a unit 60 for reshaping the signal to a pulse suitable for processing in the counter block 62. A flip-flop Counting Active Index 64 is
15 set to ON status by the reshaped start pulse delivered by the pulse shaping unit 60. This status information appears on the Control During Counting line 48. The reshaped start pulse delivered by the pulse shaping unit 60 also controls loading of binary data stored in the set data register 50 into the
20 counter box 62.

When clock pulses are supplied through the AND-gate 66 to the counter 62 and the counting is active, the binary value in the counter 62 is counted down. When the count value zero is reached all binary bits in the counter 62 are equal to zero.
25 On the next clock pulse all bits in the counter 62 will be changed to "one". There is one bit more in the counter 62 than the most significant bit in the value and when this extra bit changes from "zero" to "one", a Count-Out is indicated on the c/o control line 46. Said most significant
30 bit is always loaded from the set data register 50 as a "zero". At the Count-Out status the flip-flop Counting Active Index 64 is set to OFF status.

The gates shown in the block diagram in figure 6 control safe processing of the counter 62. Thus the AND-gate 66 which is

connected to the clock input, secures that the counter 62 only counts down when the counter block is in its active stage.

5 The Start Event line 56 is connected to the pulse shaping unit 60 through an AND-gate 58 with one of its inputs inverted to protect loading of set data again after the counter has been active.

10 A similar AND-gate 68 with one of its inputs inverted is connected to a Count-Out Index 70 to prevent a Stop Event on line 72 through the OR-gate 74 and the pulse shaping unit 76 from changing this index after a Count-Out has occurred. The OR-gate 74 stops and resets the Counting Active Index 64 either as a result of a Stop Event on line 72 or a Count-Out event.

15 Figure 7 shows the counter box 62 in figure 6 in more detail. The counter 62 comprises an enough number of binary stages 78, 80 ... 82. In addition thereto there is an extra binary stage 84. Each binary stage 78, 80, 82, 84 can be loaded with one bit, "zero" or "one", from the set data register 50 in
20 figure 6. This supply of set data is gated to occur when the load new data line 54, see figure 6, gets a pulse. The extra binary stage 84 will be loaded with the value "zero". When the counter 62 in figure 5 has counted down to the value "zero" on all stages 78, 80, ... 82, 84, all stages 78, 80,
25 ... 82, 84 will switch to "one" in response to the next pulse. The signal from the last stage 84 is controlling the Count-Out indication and the deactivation of the counting.

30 Figure 8 shows the Atrial Tachy Counter (ATC) 28 of the Mode Switch Electronics shown in figure 4 in the form of a generalised counter block. This counter measures the time between two consecutive atrial events and compares this time with a predetermined Atrial Tachy Limit 86. An event can be any detection by the atrial P-wave detector or atrial tachycardia signal detector in the case when two separate

atrial detectors are used. If there are other cardiac events during the counting procedure, e.g. a ventricular stimulation, these events shall not influence this counter.

5 The set value of the counter 28 is the programmed Atrial Tachy Limit 86 for an atrial tachycardia.

10 In the example shown in figure 8 the output signal c/o on line 88 indicates that the last measured interval was not a tachy interval because there has been a Count-Out. This means that the signal on the c/o-line 88 is reversed. This is one essential element in the mode switch determination.

15 Figure 9 shows the Cardiac Event Interval Counter 30 in figure 3 in the form of a corresponding generalised counting block. With this counter 30 the time between the two latest cardiac events is measured and compared with the Atrial Tachy Limit.

20 Starting events 90 can be end of post ventricular atrial blanking (PVAB), which is a protection period in the detectors after a ventricular stimulation, and the end of post atrial-atrial blanking (PAAB), which is a protection period in the detectors after an atrial stimulation, an atrial tachycardia signal detection, P-wave detection or R-wave detection. R-wave detection can only be used if the so-called Combipolar mode of sensing is used, see below.

25 In a corresponding way stop events 92 can be a ventricular stimulation V-stimulation, an atrial stimulation, an atrial tachycardia signal detection, a P-wave detection or a R-wave detection, the last mentioned detection being possible only in case of Combipolar mode of sensing.

30 The set value 94 is also in this case the programmed Atrial Tachy Limit for an atrial tachycardia. In the example illustrated in the figure an output c/o-signal on output 96 indicates that the measured interval was not a tachy interval, since there was a Count-Out. The non-tachy indication on

the output 96 is one essential element in the mode switch determination.

Figure 10 shows in the form of a block diagram the Automatic Mode Switch (AMS) Check Block 32 in figure 4. Most elements of the AMS Check Block are equal to those of the Generalised Counter Block 36, illustrated in figure 6. It is added the functions of counting up the counter 98 and comparison of the counter value with the set data value. Thus, after receipt of a start event on line 100, the Automatic Mode Switch Check Block 32 is activated until one of two possibilities occurs, viz. the counter reaches zero value or the set data value. Then the counter 98 is deactivated and a type of Count-Out is stored in the Count-Out Index Register 102.

The Set Data register 104 is in reality two different registers, each with its own Set Data value. One of these values is used when starting the counting in a DDD mode of operation and the other value when the counting is started in a DDI mode. Thus, when a start pulse is received the relevant value of these two values is loaded into the counter 98.

The AND-gate 106 with one of its inputs inverted prevents through the Load New Data line 108 loading of new Set Data after receipt of a start pulse.

The counter 98 is controlled by each detected ventricular event, i.e. a ventricular stimulation or an R-wave detection, supplied through the AND-gate 108. The counter 98 is controlled to count down if there is an indication that the measured interval in question in the Cardiac Event Interval Counter, see figure 9, is longer than the Atrial Tachy Limit. The counter 98 is controlled to count up if there is an indication that the measured interval between atrial signal detections is shorter than the Atrial Tachy Limit ATI. If none of these conditions is fulfilled the counting is dismissed and the counter 98 disabled through the control line Clock Enable 112 to the AND-gate 108.

If the counter 98 reaches the same value as the set value and this occurs during counting up, a signal Return Stop is delivered by the counter 98 on its output 114. This signal Return Stop stops the activities in the Automatic Mode Switch
5 Check Block and sets the Count-Out Index 102 to Count Out. This Count-Out Index 102 is controlling other parts of the pacemaker electronics to control the mode of operation. Thus, a Count-Out indication results in operation in the non-tracking mode (DDI) and an opposite indication or reversed
10 Count-Out indication results in operation in the normal tracking mode (DDD).

Figure 11 shows the Up/Down Counter 98 more in detail. The counter consists of a number of binary stages 116, 118 ... 120, which is enough to be able to count the maximum desired
15 value, plus one extra binary stage 122.

When the automatic mode switch procedure is started from the normal tracking mode (DDD), as indicated by an opposite or reversed Count-Out Index value, cf. the description of figure
20 10 above, a loading procedure is performed. Each binary stage 116, 118, ..., 120 is then loaded with one bit, "zero" or "one", from the Set Data register, 104 in figure 10. This loading is gated to be performed when a pulse is received on the Load Control of Set Data line 124. The extra binary stage 122 will then be loaded with the binary value "zero". When
25 the counter has counted down to "zero" on all stages 116, 118 ..., 120, all stages 116, 118, ..., 120 will be switched to "one" in response to the next pulse. The signal from the last stage 122 is controlling the Count-Out indication and the deactivation of the counting.

30 When the Automatic Mode Switch Check Block 32 in figure 10 is starting from the non-tracking mode (DDI), indicated by the Count-Out Index, no loading of the binary stages is performed since all bits are already set to "one". However, for the binary comparison in units 126, 128, 130, another value is
35 used, which is equal to the number of ventricular intervals

required for change from the DDI mode to the DDD mode. The selection of a suitable value for this binary comparison is performed in gates not shown in the figure. In the units 126, 128, 130 a binary comparison is performed and when the counter value reaches the set value a Return Stop signal is delivered on the output 132. After start the counter is counting up or down depending on the logic state on the Up/Down Control of Counting line 134. The direction of the counting can be reversed after start of the counting.

Above a specific technique is described using counters and decoding logics for counting a specific number of pulses. However, the essential function of the invention consists in counting a number of ventricular intervals during a check of tachycardia indications for deciding of mode switch, and the same or similar functions can also be realised by using other techniques, e.g. microprocessor techniques.

To sum up, in the pacemaker according to the invention a mode switch from a tracking mode of operation, e.g. DDD, to a non-tracking mode, e.g. DDI, is performed when there is an atrial tachycardia with a rate exceeding a programmed limit. The determination and confirmation that a state of atrial tachycardia actually prevails are performed by using a predetermined number of stimulation intervals during which other, or preferably all, cardiac signal intervals are analysed. This phase after detection of an atrial tachycardia in DDD mode or detection of a disappeared tachycardia in DDI mode is called consideration or check phase, during which it is considered or checked if the mode should be switched or not.

Atrial events are continuously monitored by an atrial tachycardia signal detector or P-wave detector and when the interval between two consecutive atrial signals is less than a programmed atrial tachycardia limit value an index memory is set to tachy indication. When there is a measured interval between any cardiac event during a subsequent cardiac cycle,

which is longer than the programmed tachycardia limit value, the index memory is set to a non-tachy indication. The interval measurements are accomplished by two interval counters, viz. an Atrial Tachy Counter and a Cardiac Event
5 Interval Counter. The measured values are compared to the programmed tachycardia limit value and the result of the comparison is stored in ON/OFF memories. The index information is used at the next ventricular stimulation to increase the safety in the determination of whether a state
10 of tachycardia prevails or not, before the final decision of pacemaker mode of operation is made. Thus, at each ventricular stimulation the previous indication in the index memory is used to count up or count down the mode change counter. If there have been at least one indication during
15 the interval between two consecutive ventricular stimulations, the mode change counter is counted up by one if the last indication is a tachy, and, if the last indication is non-tachy, the counter is counted down by one. If there is no new indication during the interval between two consecutive
20 ventricular stimulations the mode change counter is not altered. When the counted value reaches a programmed limit a mode switch occurs on the next ventricular stimulation.

A spontaneous ventricular beat, R-wave, is controlling the mode change counter in the same way as a ventricular
25 stimulation.

After a mode change to a non-tracking or non-synchronous mode, for example DDI or VVI, the ventricle is stimulated with a basic rate during the state of atrial tachycardia. This basic rate can be constant, for instance with a somewhat
30 higher value than the basic rate used in the tracking DDD-mode of operation. The basic rate can, however, also be varied under the control of one or more activity or physiological sensors.

Thus, the pacemaker according to the invention operates as follows.
35

The atrial signals are continuously monitored, also after a mode change. As long as the indication in the index memory then shows an ongoing tachycardia the non-tracking or non-synchronous mode of operation is maintained. If a non-tachy
5 indication appears the mode change counter will count correspondingly on the issue of the next ventricular stimulation or R-wave detection. After the mode change counter has counted down to the programmed limit number, the mode of operation is changed back to DDD.

10 At detection of a tachycardia the number of high rate synchronized stimulation intervals is limited to a programmed number, e.g. 3 and thereafter the mode will change to a non-synchronized mode like DDI. The similar principle is used for changing back to the synchronous DDD mode after disappearance
15 of the atrial tachycardia. The number of stimulation intervals at the base rate without a tachycardia is programmable.

The atrial tachycardia limit value is stored in the pacemaker. This limit value can suitably be a value in the range 400 ms - 240 ms, corresponding to 150-250 beats per minute.
20 Every measured atrial interval, shorter than the atrial tachycardia limit ATI and longer than a value of e.g. 140 ms is then indicated as a tachy interval. The atrial tachycardia rate can suitably be varied in steps of 10 beats per minute.

For the detectors a Combipolar configuration can be used, as
25 indicated above, or the normal bipolar configuration. The Combipolar technique is described in e.g. Herzschriftmacher 17:2, 1997, p.108 and EP-A1-0 596 319. As the Combipolar lead configuration gives AV-differential signals, it is important that the logic conclusions are appropriately designed to
30 avoid that ventricular signals are falsely interpreted as atrial signals.

A situation in which the measured interval between two atrial signals is longer than the atrial tachy limit and no other interval is longer than the atrial tachy limit, this could

indicate that there is a covered atrial signal during the ventricular blanking period. For the atrial tachycardia signal detection no refractory period is used, only a technical blanking period to avoid crosstalk sensing in Combipolar mode of sensing at a ventricular stimulation or at the appearance of an R-wave. In some tachycardia situations stable covering of atrial tachycardia signals may thus occur by the blanking interval following the ventricular stimulation. The basic principles for uncovering consists then in a change during one or more stimulation intervals of the time for the ventricular stimulation. This change of time can be obtained by temporary changes of one of the pacemaker parameters resulting in a shortening or a prolonging of the PV-intervals. A suitable uncovering method for this purposes is described in US-5,683,428.

As mentioned above two types of atrial signals should be detected, viz. normal P-waves and atrial signals at atrial tachycardia. Normal P-waves for controlling the pacemaker stimulation rhythm have a stable amplitude with a variation normally less than $\pm 15\%$. A too high detector sensitivity can give rise to interference detections, which is not acceptable since such false detections will influence the rhythm of the normal pacemaker operation. In case of an atrial tachycardia or an incipient atrial tachycardia the amplitude of the atrial signals normally decreases, although they sometimes increase. Atrial fibrillation signals have, however, low and varying amplitudes and also a bad slew rate compared to normal P-waves and therefore a higher atrial detection sensitivity is needed for detection of these signals.

The preferred way of detecting the atrial signals is therefore to use one atrial signal detector for normal P-waves and one detector adapted for detecting atrial signals of lower amplitudes. The ratio between the sensitivities of the detector for detecting atrial signals in case of an incipient tachycardia and the sensitivity of the normal P-wave detector can preferably be changed in steps of 0.4 in the range 1.2-

2.0. For these two detectors two separate amplifier and filter paths adapted to the signals in question, are provided in the pacemaker electronics. The filters must be designed for adequate R-wave attenuation and T-wave attenuation. Also
 5 myocardial signals have to be attenuated and the filters must be designed to avoid ringing on the signals.

Instead of two separate detectors it is, however, also possible to use the ordinary P-wave detector, and then with two separate tachy sensitivity settings, one sensitivity
 10 suitable for the atrial signal detection at atrial tachycardia and one suitable for ordinary P-wave detection.

The above described embodiments of the pacemaker according to the invention are dual chamber pacers. However, the invention can be applied to left ventricle pacing or four chamber
 15 pacers as well.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182

Claims

1. A pacemaker operable in a tracking and a non-tracking mode and having an automatic mode switching function for switching the pacemaker into the non-tracking mode of operation in response to the detection of an atrial tachycardia, said pacemaker including atrial detecting means (8,24) for detecting atrial events, ventricular detecting means (10,26) for detecting ventricular events, an atrial interval determining means (28) for determining an interval between consecutive atrial events, a comparison means for comparing said interval with a predetermined atrial tachycardia limit value for recording a tachy indication if said interval is less than said atrial tachycardia limit value, and a mode switching means (32) for switching the mode of operation to said non-tracking mode when the number of recorded tachy indications reaches a predetermined tachy count limit, **characterized in** that a cardiac event interval determining means (30) is operable in response to the recordal of a tachy indication to determine additional intervals between cardiac events, detected by said atrial detecting means (8,24) or said ventricular detecting means (10,26), for supply to said comparison means for comparing said additional intervals with said tachycardia limit value and reducing said recorded number of tachy indications by one non-tachy indication, if at least one of said additional intervals during a pacemaker interval between two consecutive ventricular stimulations or R-wave detections is longer than said tachycardia limit value.
2. The pacemaker according to claim 1, **characterized in** that said cardiac event interval determining means (30) is operable to determine all intervals between cardiac events, detected by said atrial detecting means (8,24) and said ventricular detecting means (10,26) in a pacemaker interval.

3. The pacemaker according to claim 1 or 2, characterized in that said atrial detecting means (8,24) comprise a P wave detector for detecting ordinary P waves and an atrial tachycardia detector of higher sensitivity for monitoring atrial tachycardia signals.

4. The pacemaker according to any one of the preceding claims, characterized in that said mode switching means (32) comprises an up/down counter (98) which is adapted to be counted up by one for each tachy indication and counted down by one for each non-tachy indication.

5. The pacemaker according to any one of the preceding claims, characterized in that said determining and comparison means comprise counters (28,30) which are started by a detected cardiac event to count clock pulses until a pre-set value is reached, corresponding to said predetermined tachycardia limit value, or a stop event is detected by said atrial detecting means (8,24) or said ventricular detecting means (10,26).

6. The pacemaker according to claim 4, the pacemaker being operable in said non-tracking mode, characterized in that said mode switching means is adapted to switch mode of operation back to the tracking mode when its tachy indication counter is counted down by a predetermined number from said predetermined tachy count limit.

7. The pacemaker according to claim 4, the pacemaker being operable in said non-tracking mode, characterized in that said mode switching means (32) is adapted to switch mode of operation back to the tracking mode when its tachy indication counter (98) is counted down to zero.

8. The pacemaker according to any one of the preceding claims, characterized in that said non-tracking mode of operation is a DDI mode.

9. The pacemaker according to any one of the preceding claims, characterized in that a means (18,20) is provided for changing the AV interval in order to uncover possible atrial events covered by the ventricular blanking period.
- 5 10. The pacemaker according to claim 9, characterized in that said means (18,20) for changing the AV interval is operable to shorten the AV interval in response to the detection of a decrease of the pacemaker interval below a predetermined limit, preferably equal to twice the atrial
- 10 tachycardia limit value.
11. The pacemaker according to any one of the preceding claims, the stimulation rate being equal to a base rate in case of failing heart activity, characterized in that said base rate is sensor controlled.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
219

Abstract

A pacemaker is operable in a tracking and a non-tracking mode and has an automatic mode switching function for switching the pacemaker into the non-tracking mode of operation in response to the detection of an atrial tachycardia. The pacemaker includes atrial detecting means for detecting atrial events, ventricular detecting means for detecting ventricular events, an atrial interval determining means (28) for determining an interval between consecutive atrial events, a comparison means for comparing said interval with a predetermined atrial tachycardia limit value for recording a tachy indication if said interval is less than said atrial tachycardia limit value, and a mode switching means (32) for switching the mode of operation to said non-tracking mode when the number of recorded tachy indications reaches a predetermined tachy count limit. A cardiac event interval determining means (30) is further operable in response to the recordal of a tachy indication to determine additional intervals between cardiac events, detected by the atrial detecting means or the ventricular detecting means, for supply to the comparison means for comparing the additional intervals with the atrial tachycardia limit value and reducing the recorded number of tachy indications by one non-tachy indication, if at least one of the additional intervals during a pacemaker interval between two consecutive ventricular stimulations or R-wave detections is longer than the tachycardia limit value.

Fig. 4

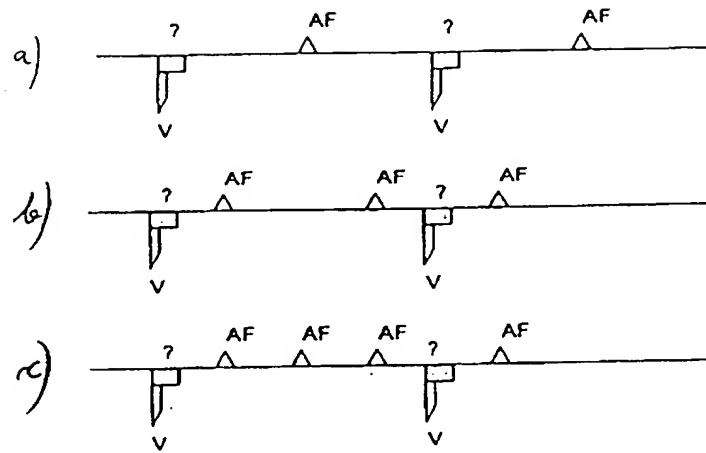


Fig. 1

Pacemaker System Overview

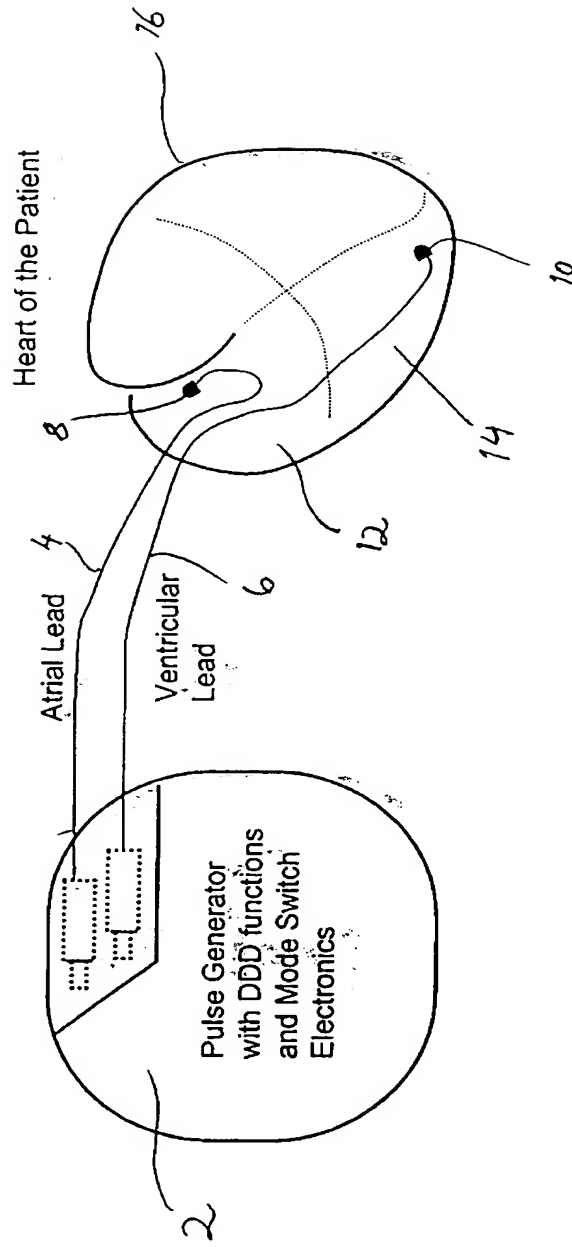


Fig 2

Pacemaker Electronics

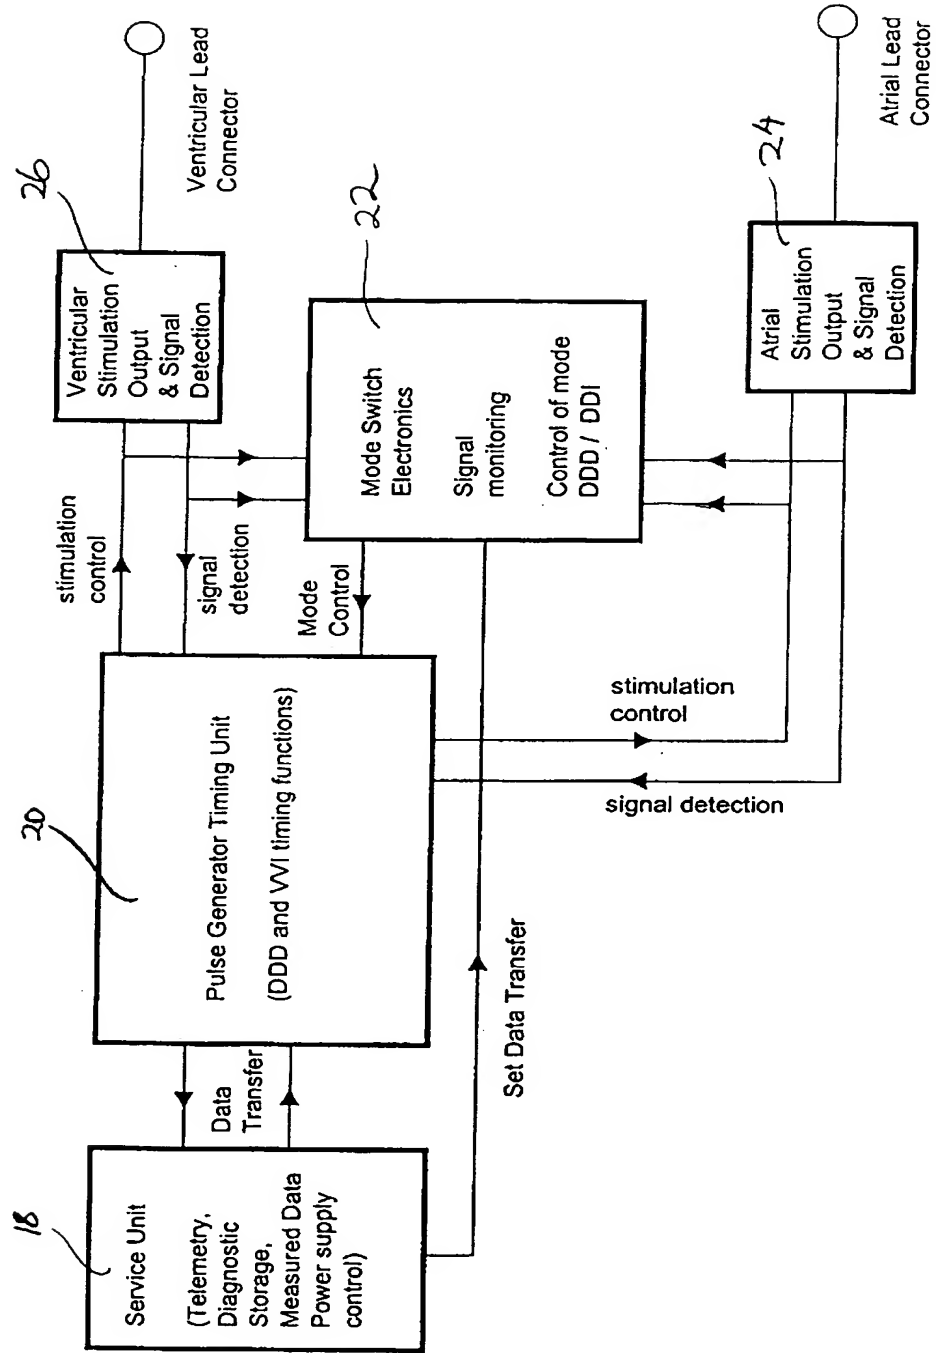


Fig 3



Generalized Counter Block

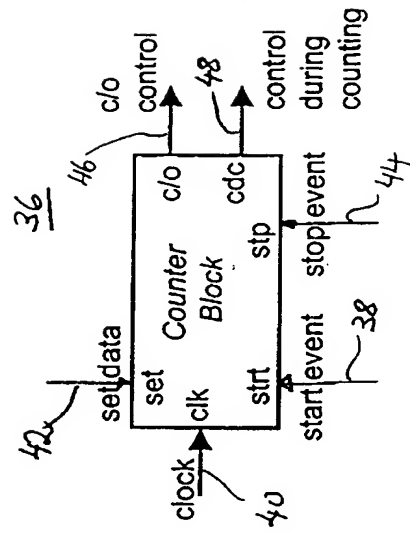


Fig 5

Generalized Counter Block

36

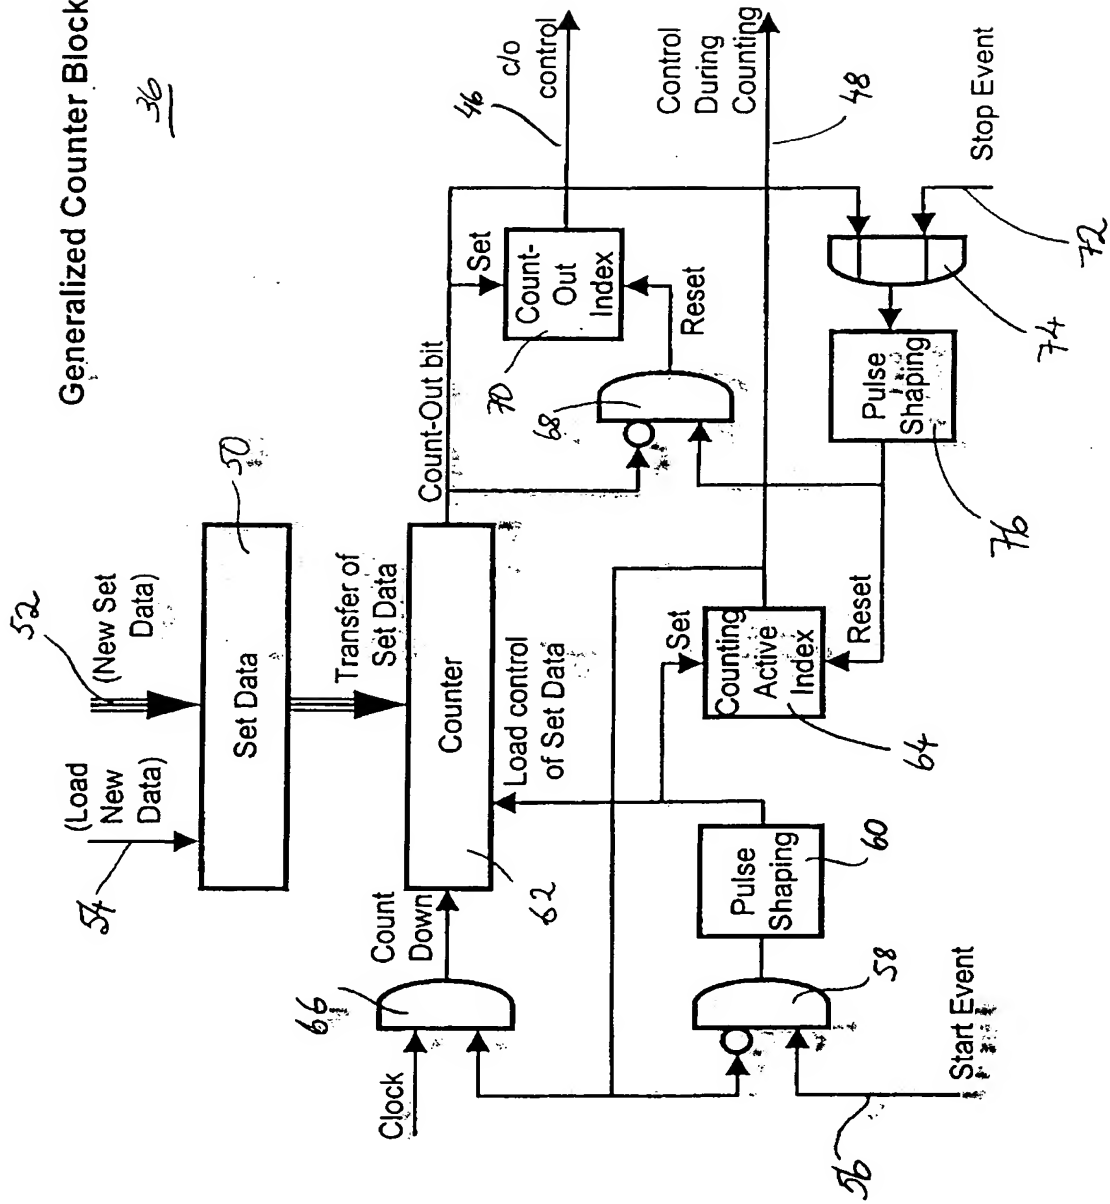


Fig 6

62

Counter Box

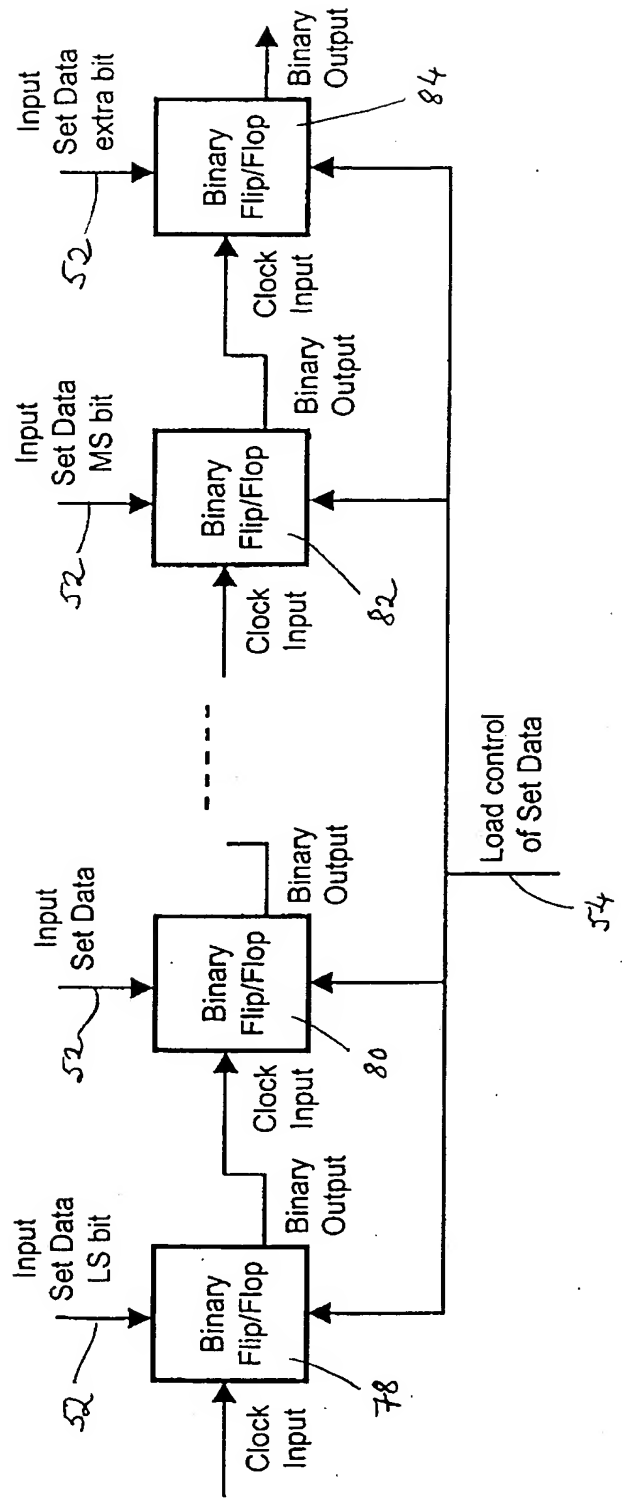


Fig 7

Atrial Tachy Counter (ATC)

28

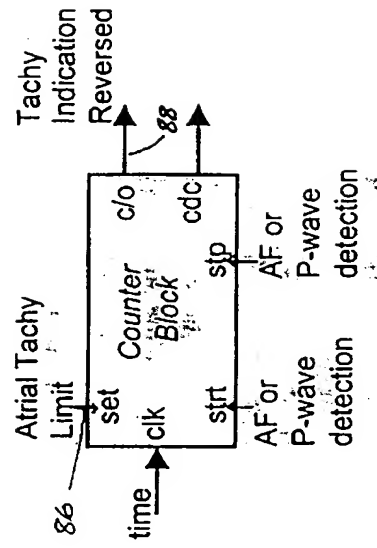


Fig 8

Cardiac Event Interval Counter

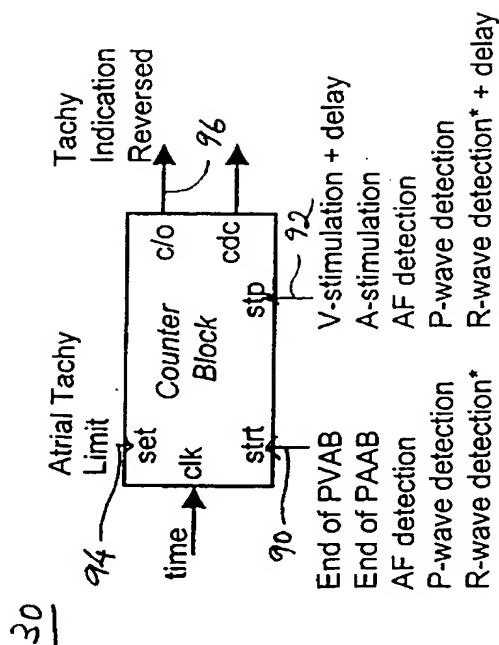


Fig 9

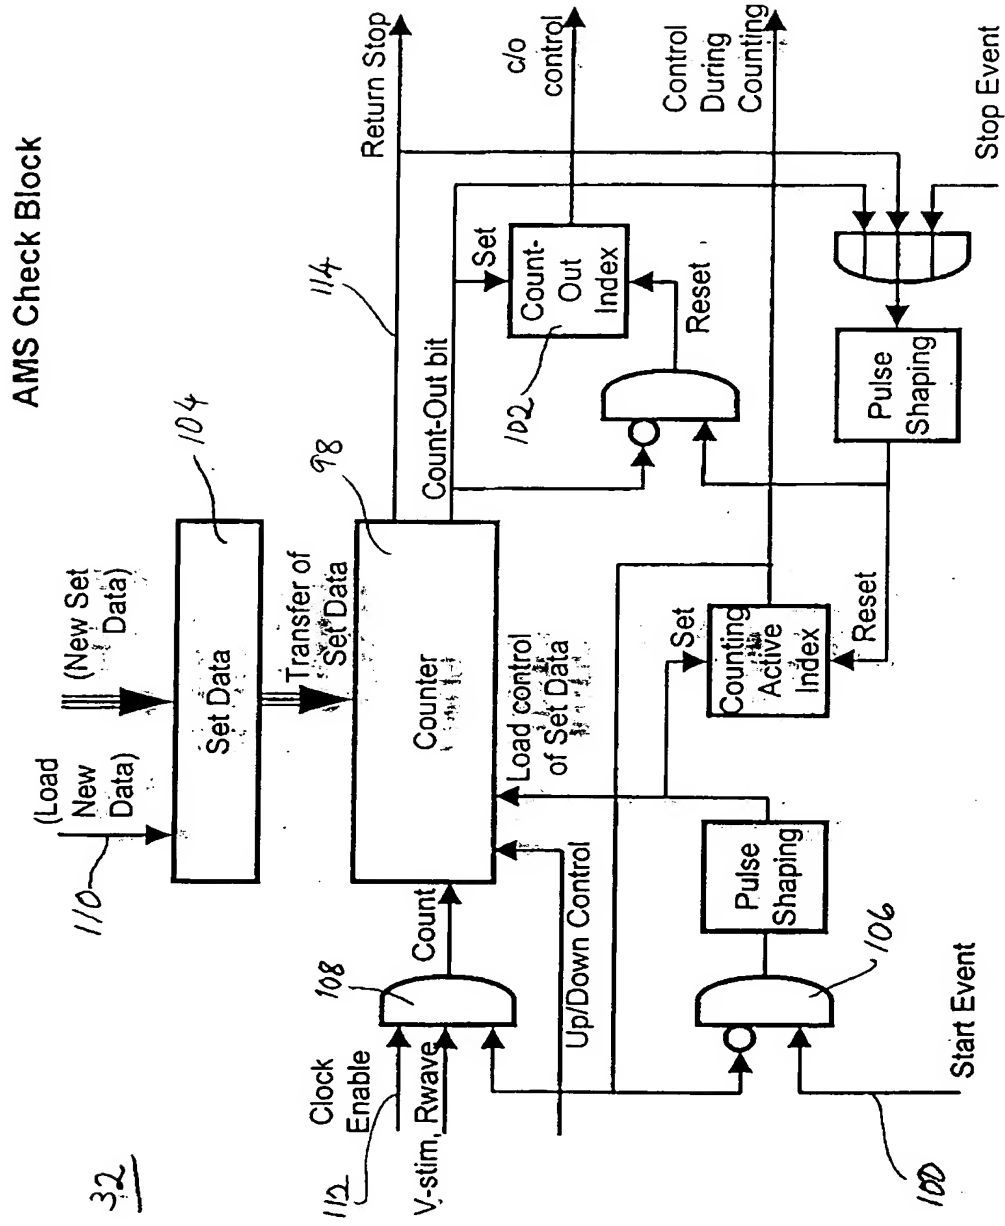


Fig 10

Up/Down Counter Box

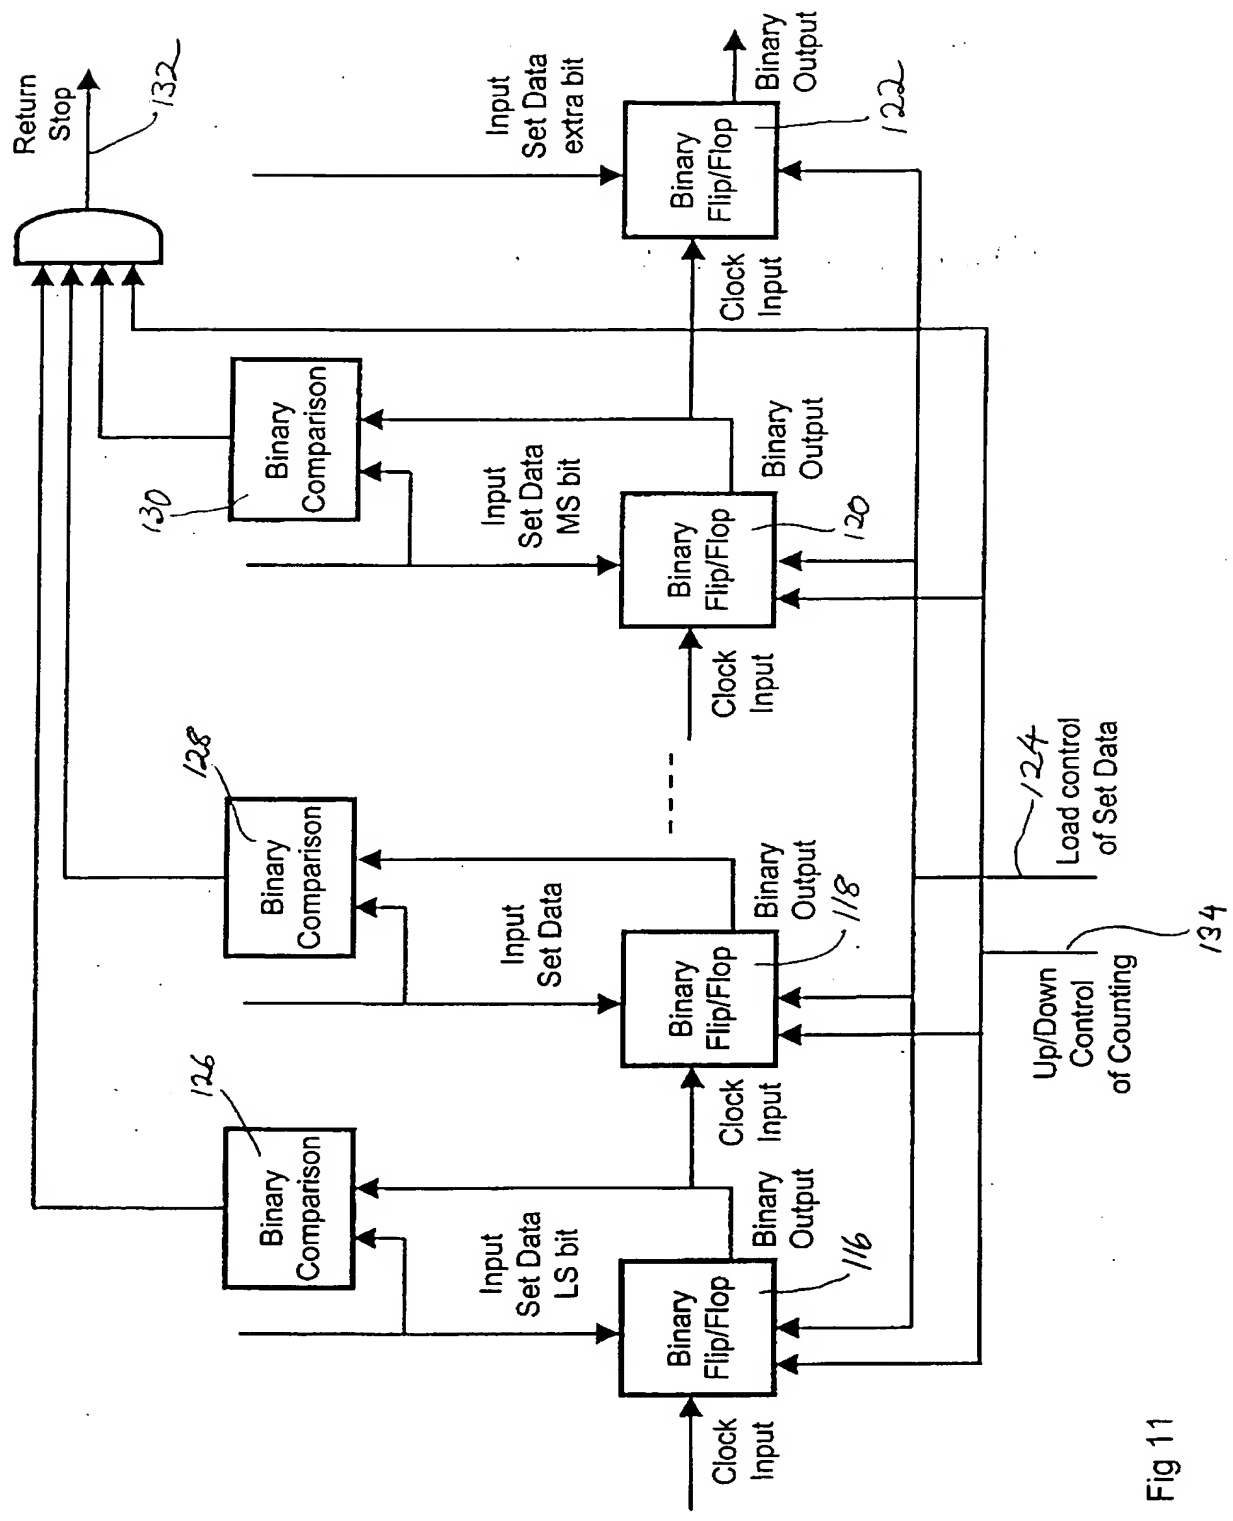


Fig 11

This Page Blank (uspto)